



**THE BEST WARRANTY
IN THE BUSINESS —
5 YEARS ON ALL PARTS.**



**THE CAPACITY YOUR
CUSTOMERS DEMAND**

Maytag® multi-load dryers are the perfect match for large-capacity washers, handling big, bulky items. Plus, the extra-large door opening makes loading easier.



MICROPROCESSOR COIN-DROP

Advanced programmable controls let you adjust pricing at the touch of a button. Optional audit system matches cycles used to coins collected for additional accountability.

FOR YOUR CUSTOMERS:

- Large 50-Pound Capacity
- One Touch Selects Drying Temperature
- Digital Display Shows Time Remaining In Cycle

FOR YOUR OPERATION:

- Fits Through 36" Doorway
- Extra-Large Security Coin Vault
- Easy-Access Design For Self-Service

BUILT-TO-LAST™ FEATURES:

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor
- The Best Warranty In The Business

MAYTAG® COMMERCIAL MULTI-LOAD DRYER


MDG50PCCWW



**COMPUTER
CONTROLS
PROVIDE THE ULTIMATE IN
ACCOUNTABILITY.**

LAUNDRY SOLUTIONS YOU CAN *DEPEND* ON.

Multi-Load Dryer — MICROPROCESSOR COIN-DROP

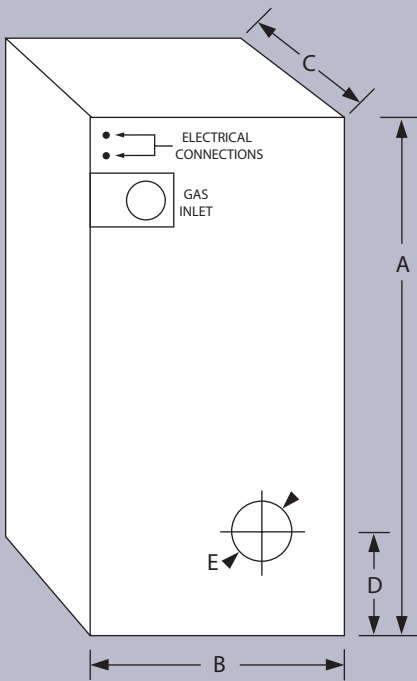

5 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



Multi-Load Dryer	
DRYER SPECIFICATIONS	
MODEL	MDG50PCCWW
TUMBLER	
Capacity — lbs. (kg)	50 (22.7)
Capacity — cu. ft. (cu. m)	18.3 (.518)
Diameter — in. (cm)	32 ³ / ₄ (83.2)
Depth — in. (cm)	37 ¹ / ₂ (95.3)
DRIVE MOTOR	
HP (kw)	³ / ₄ (.560)
AIRFLOW	
Cfm (cmm)	600 (17)
HEAT INPUT	
BTU/hr. (kcal/hr.)	150,000 (37,800)
GAS INLET	
In. (cm)	1 ¹ / ₂ (1.3)
VOLTAGE/BREAKER SIZE — amps	
120V/1 PH	20
COLORS	
White	.
Bisque	.
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	700 (317.7)
Uncrated — lbs. (kg)	651 (295.3)
DIMENSIONS	
A) Height — in. (cm)	72 (182.9)
B) Width — in. (cm)	34 ¹ / ₄ (87)
C) Depth including door handle — in. (cm)	49 ⁵ / ₈ (126)
D) Floor to center of exhaust — in. (cm)	10 ¹ / ₂ (26.7)
E) Exhaust diameter — in. (cm)	8 (20.3)*
Door opening — in. (cm)	21 ¹ / ₂ (54.6)
*Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.	
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.	



NEW YORK CITY
M.E.A.



**530 D Asbury Drive
Mandeville, LA 70471
(800)254-WASH
(985)626-7599**

(985)626-7543 fax

**sales@piercecommercial.com
www.piercecommercial.com**